

Features

- Surface/chain mount with standard white reflector
- A variety of lengths available
- UL Listed

Specifications

- Ballasts are thermally protected class P, non-PCB & UL listed. Electronic ballasts are sound rated A. Multi volt 0° F ballast T8 & T12, -20° T8 & T12 HO.
- Housings are formed from cold rolled steel and painted with a high gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Surface, pendant, chain or suspended mounting.
- Reflectors are formed with lateral embossments and a return flange for strength and rigidity.



Application

- Commercial/residential
- Warehouses
- Production areas
- Garages
- General Lighting

Options

- Program start T8 HO
- LBF (T8 slim line low ballast factor)

Accessories

- Emergency battery pack
- V-hooks
- Stems/canopies
- Wire guard
- Occupancy sensor
- Uplight reflectors

Catalog Number	Type




600 Series

4', 6' & 8'

Dimensions

Dimensions are subject to change.
Consult factory for verification.
All configurations/options may not be shown.

Back View

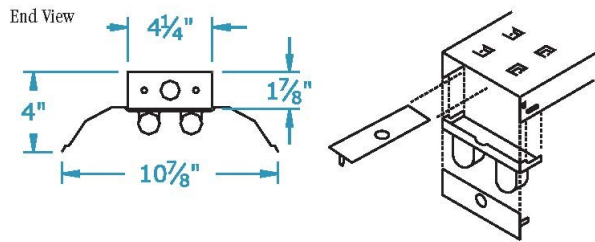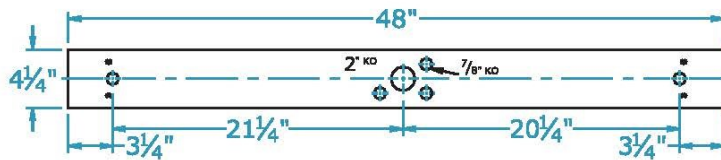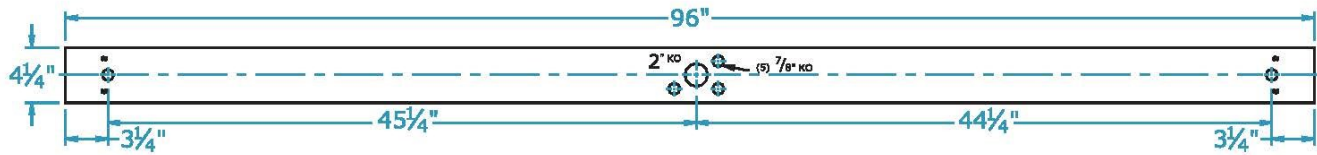

Ordering Information

Example: 602-96 HO T12 XV

