

Features

- Surface/chain mount with standard white reflector
- A variety of lengths available
- UL Listed

Specifications

- Ballasts are thermally protected class P, non-PCB & UL listed. Electronic ballasts are sound rated A. Multi volt 0° F ballast T8 & T5, -20° F T5HO.
- Housings are formed from cold rolled steel and painted with a high gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Surface, pendant, chain or suspended mounting.
- Reflectors are formed with lateral embossments and a return flange for strength and rigidity.

Application

- Commercial/residential
- Warehouses
- Production areas
- Garages
- General Lighting

Options

- Dimming
- Dual level wiring
- -20° F T8 120-277v instant start.
- Program start
- LBF (T8 low ballast factor)
- HBF (T8 high ballast factor)



Accessories

- Emergency battery pack
- V-hooks
- Stems/canopies
- Wire guard
- Occupancy sensor
- Uplight reflectors
- Chrome reflectors

| Catalog Number | Type |
|----------------|------|
| | |



603 Series

3 LAMP, NARROW BODY



Dimensions

Dimensions are subject to change.
Consult factory for verification.
All configurations/options may not be shown.

Back View

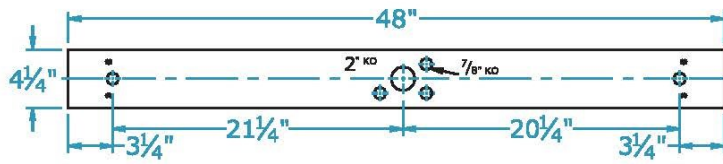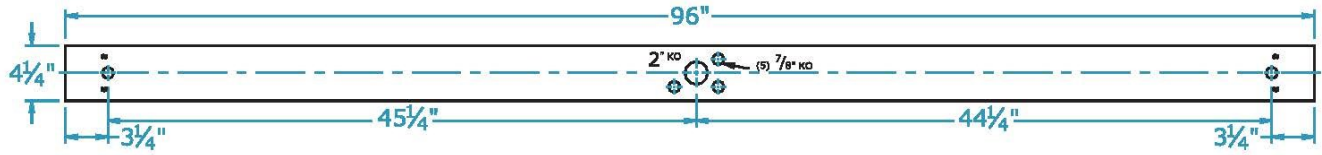

End View

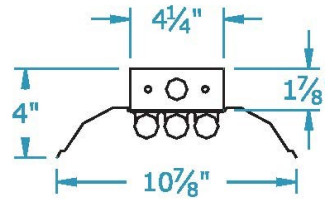

Ordering Information

Example: 6T6-32-8 NB XV

NB Indicates narrow body

