

# Ultra Light T8 Series

OPEN STRIP

## Features

- White finish, surface mount
- Designed for limited space application
- Roto lock, snap-in polycarbonate sockets
- UL Listed

## Specifications


- Ballasts are thermally protected Class P, non-PCB and UL listed. Electronic ballasts are sound rated "A".
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for ceiling or wall mounting and is available in many sizes and lamp configurations.

## Application

- Commercial or residential
- Coves
- Narrow soffits
- Jewelry cases
- Display cabinets

## Options

- Multi-volt (120-277v, 50 or 60 Hertz)
- 0 Degree F
- Dimming
- THD less than 10% - instant start

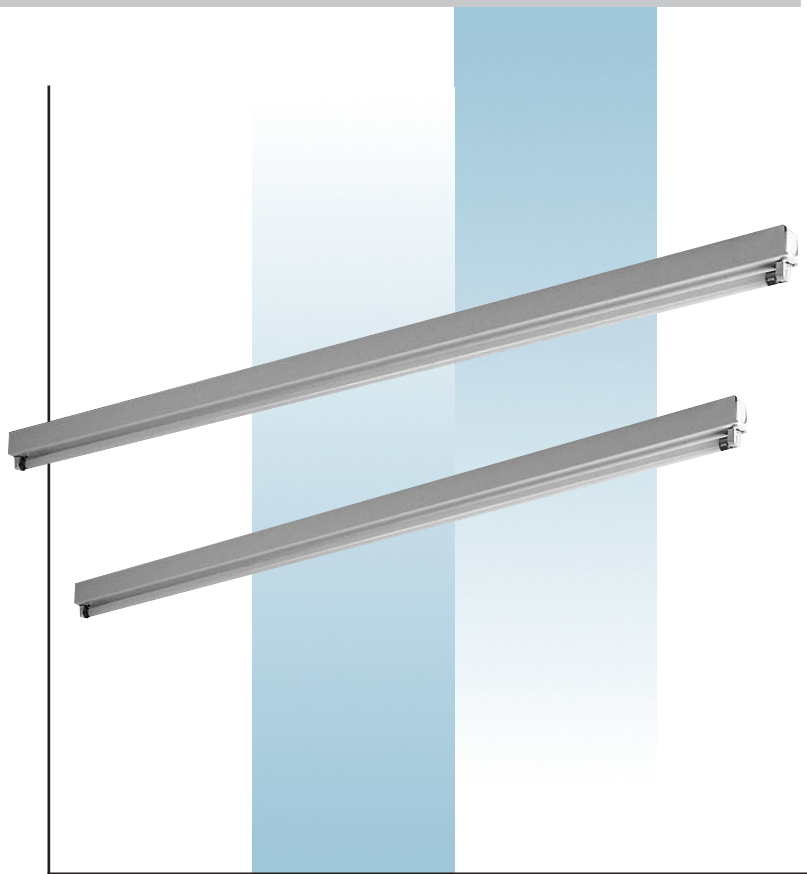

## Accessories

- Reflectors  
See accessories page for details






Catalog Number	Type

# Ultra Light T8 Series

OPEN STRIP

## Dimensions

Dimensions are subject to change.  
Consult factory for verification.  
All configurations/options may not be shown.



## Ordering Information

Catalog #	No & Lamp Type	O/A Length	O/A Width	O/A Depth	Wt.
UV-117 T8 XV	1-F17T8	24 1/16"	1 3/4"	2 7/8"	2 3/4
UV-125 T8 XV	1-F25T8	36 1/16"	1 3/4"	2 7/8"	3 1/2
UV-132 T8 XV	1-F32T8	48 1/16"	1 3/4"	2 7/8"	4 1/4
UV-140 T8 XV	1-F40T8	60 1/16"	1 3/4"	2 7/8"	5 1/4
UV-T2-25-6 T8 XV	2-F25T8	72 1/8"	1 3/4"	2 7/8"	6 1/4
UV-T2-32-8 T8 XV	2-F32T8	96 1/8"	1 3/4"	2 7/8"	7 3/4

XV = Multi-volt

