

Ultra Light T5 Series

SIDEMOUNT, RIGHT ANGLE OR OPEN STRIP

Features

- White finish, surface mount
- Designed for limited space application
- Roto lock, snap-in polycarbonate sockets
- UL Listed

Specifications


- Ballasts are thermally protected Class P, non-PCB and UL listed. Electronic ballasts are sound rated "A".
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for ceiling or wall mounting and is available in many sizes and lamp configurations.

Application

- Commercial or residential
- Coves
- Narrow soffits
- Jewelry cases
- Display cabinets

Options

- 120 volt
- 277 volt
- Multi-volt (120-277v, 50 or 60 Hertz)
- 0 Degree F
- Dimming
- THD less than 10% - rapid start
- Program Start
- Dual level wiring

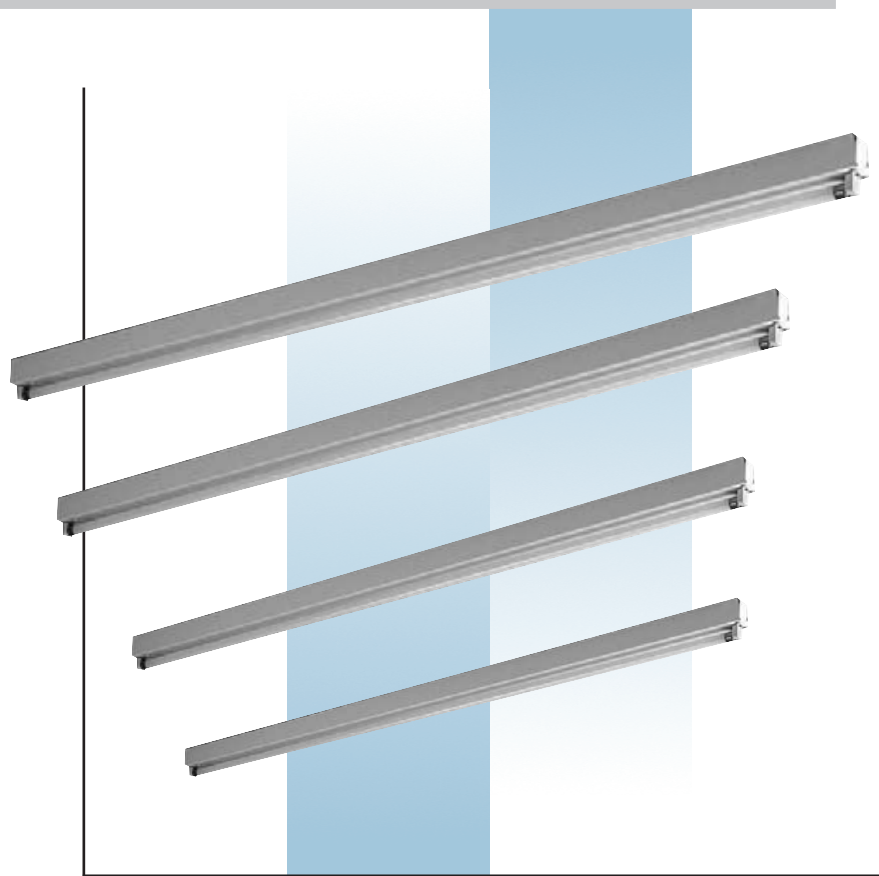

Accessories

- Reflectors

Catalog Number	Type





Ultra Light T5 Series

SIDEMOUNT, RIGHT ANGLE OR OPEN STRIP


Dimensions are subject to change.
Consult factory for verification.
All configurations/options may not be shown.

Dimensions

Back View

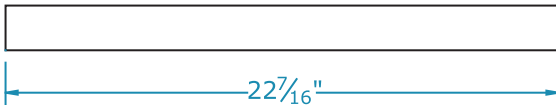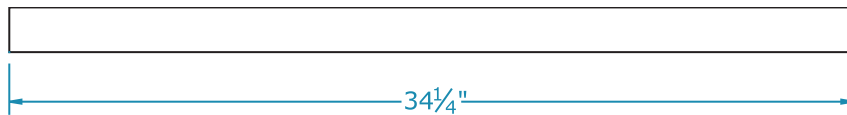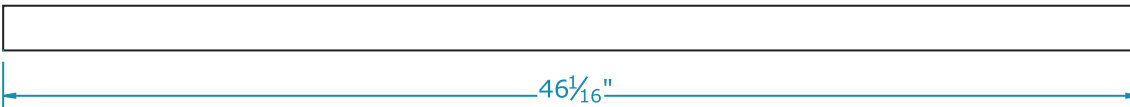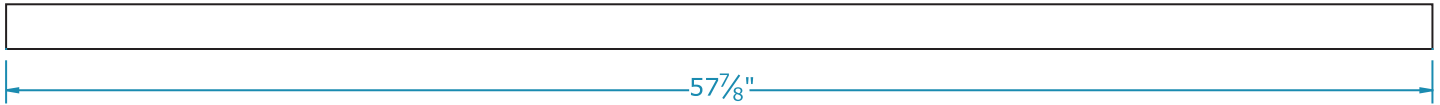


End View

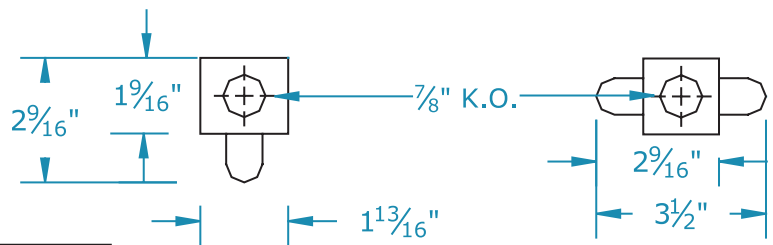

Ordering Information

Catalog #	No & Lamp Type	O/A Length	O/A Width	O/A Depth	Wt.
Open strip					
UV-114 T5 XV	1-F14T5	22 7/16"	1 13/16"	2 9/16"	2 1/2
UV-121 T5 XV	1-F21T5	34 1/4"	1 13/16"	2 9/16"	3 1/2
UV-128 T5 XV	1-F28T5	46 1/16"	1 13/16"	2 9/16"	4
UV-135 T5 XV	1-F35T5	57 7/8"	1 13/16"	2 9/16"	5
Right angle strip					
UVR-214 T5 XV	2-F14T5	22 7/16"	2 9/16"	2 9/16"	2 1/2
UVR-221 T5 XV	2-F21T5	34 1/4"	2 9/16"	2 9/16"	3 1/2
UVR-228 T5 XV	2-F28T5	46 1/16"	2 9/16"	2 9/16"	4
UVR-235 T5 XV	2-F35T5	57 7/8"	2 9/16"	2 9/16"	5
Sidemount strip					
UVS-214 T5 XV	2-F14T5	22 7/16"	3 1/2"	1 9/16"	2 1/2
UVS-221 T5 XV	2-F21T5	34 1/4"	3 1/2"	1 9/16"	3 1/2
UVS-228 T5 XV	2-F28T5	46 1/16"	3 1/2"	1 9/16"	4
UVS-235 T5 XV	2-F35T5	57 7/8"	3 1/2"	1 9/16"	5

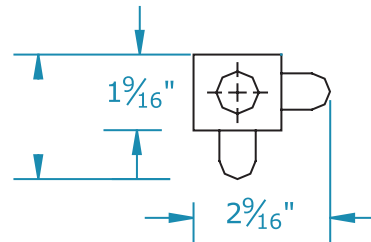

XV= Multi-volt

Consult factory for 1 lamp sidemount, 3 lamp and tandem configurations.

