

## Features

---

- T-bar ceiling installation
- Optional Flange Kit for drywall installation
- UL listed

## Specifications

---

- Ballasts are thermally protected class P, non-PCB & UL listed. Electronic ballasts are sound rated A. Multi volt 0° F ballast T8 & T5, -20° F T5HO.
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Door hinges from either side of fixture and is secured by rotary cam latches.
- Standard diffuser is 100% virgin acrylic.
- Door has mitered corners and hinges from either side.
- Integral earthquake clips standard.

## Application

---

- Commercial/Residential
- Offices
- Restaurants
- General Lighting

## Options

---

- Dimming
- Dual level wiring
- -20° F T8 120v-277v instant start
- Program start
- LBF (T8 low ballast factor)
- HBF (T8 high ballast factor)



## Accessories

---

- Emergency battery pack
- Flange kits

Catalog Number	Type


# 722 Grid Troffer Series

2X2


## Dimensions

Dimensions are subject to change.  
Consult factory for verification.  
All configurations may not be shown.


Back View

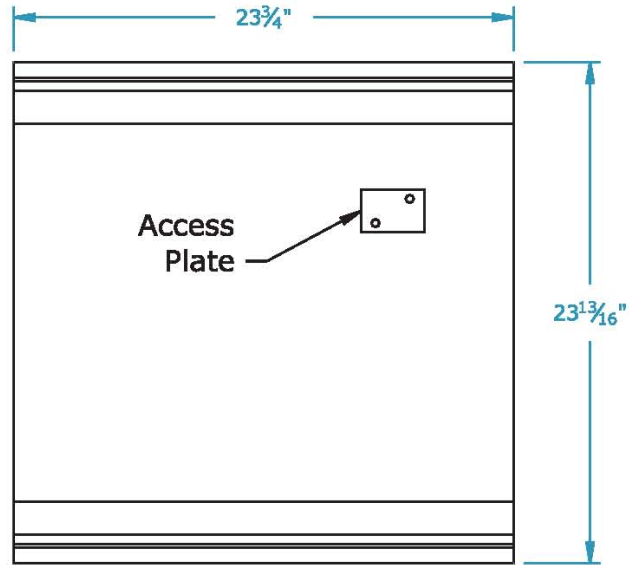


End View

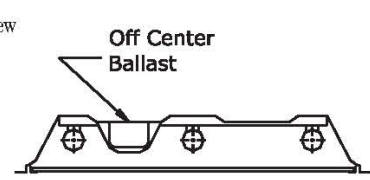

2x2  
THREE  
LAMP  
UNIT

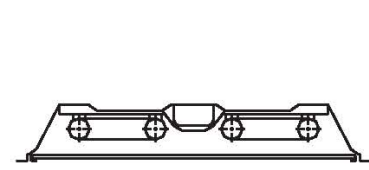


2x2  
U-LAMP  
UNIT

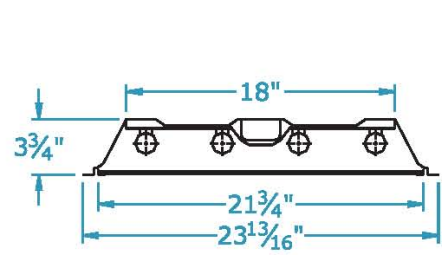

2x2  
FOUR  
LAMP  
UNIT

2x2  
TWO  
LAMP  
UNIT

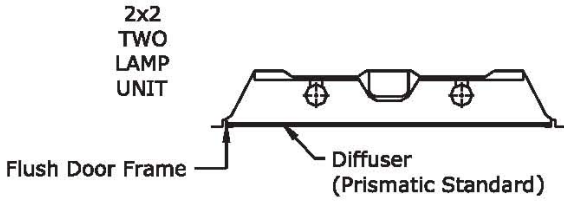

## Ordering Information

Example: 722-GA1-3D17-4XV1

