

Features

- Premium grade, recessed
- Lay-in parabolic.
- 2 1/2" deep, semi-specular louver
- UL listed
- Available in 2x2 & 2x4

Specifications

- 120-277v ballasts are thermally protected Class P, non-PCB and UL listed. And sound rated "A". 0° F ballast T8 & T5, -20° F T5HO.
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for T-bar.
- Louver is 2 1/2" deep, semi-specular, low indescent aluminum.

Application

- Commercial/Residential
- Classrooms
- Offices
- Retail Stores
- Libraries



Accessories

- Emergency battery pack (with ballast)
- Flange kits for dry wall installation
- Dual ballasts




Catalog Number	Type

P2G Grid Parabolic


Parabolic T-bar Luminaire

Dimensions

Dimensions are subject to change.
Consult factory for verification.
All configurations may not be shown.

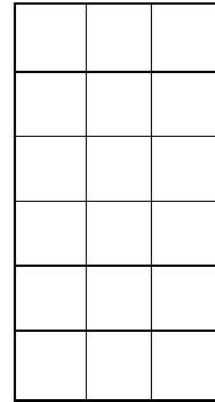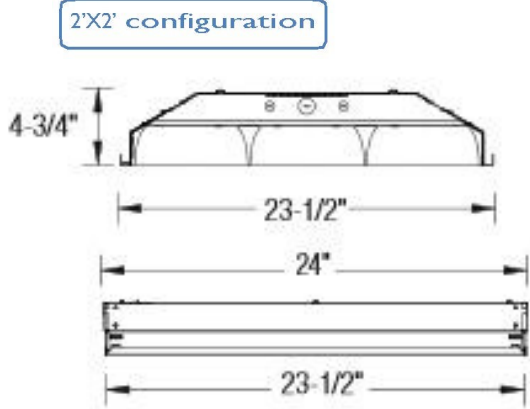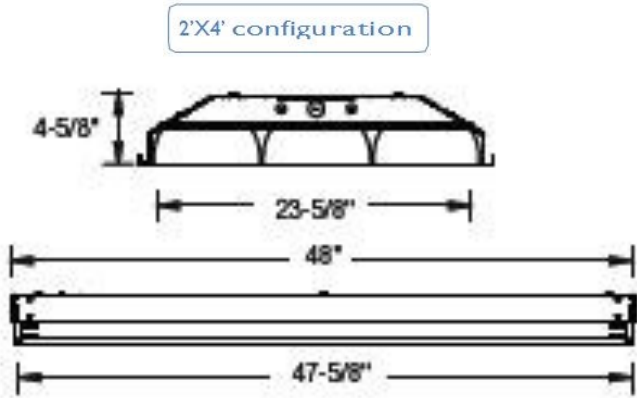


(3X6) 18 Cell




(3X3) 9 Cell

Back View

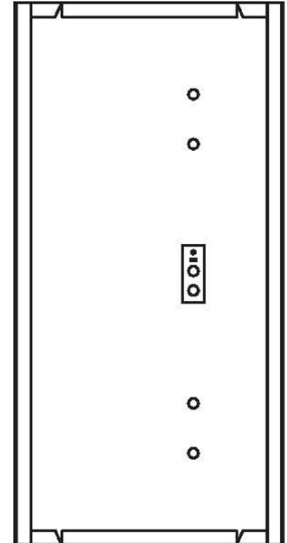


Back View



Ordering Information

Example: P2G18-3S332-3XV

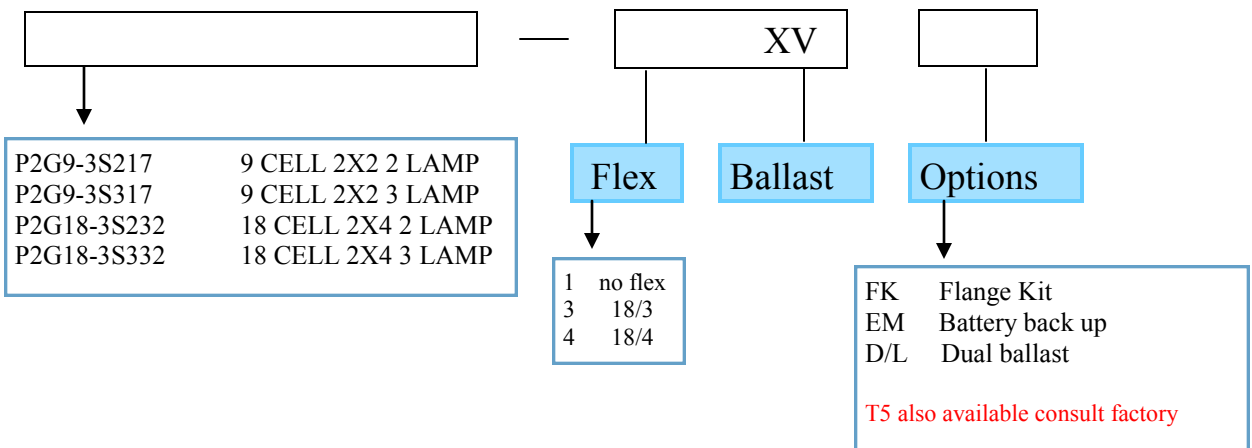

T5 also available consult factory

