

Features

- T-Bar installation
- 2½" deep, semi-specular louver
- UL Listed

Specifications

- Ballasts are thermally protected Class P, non-PCB & UL listed. Electronic ballasts are sound rated A.
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Louver is 2 ½ inches deep, semi specular, low iridescent aluminum.
- Four corner tie points for wire supports are provided for safety.

Application

- Commercial
- Offices
- General lighting

Options

- -20 Degree F
- Dimming
- THD less than 10% - instant start
- THD less than 10% - rapid start
- Program Start
- LBF (Low Ballast Factor)
- HBF (High Ballast Factor)
- Dual level wiring



Accessories

- Emergency battery pack
- Flex
- Lamps
- Flange Kits


Catalog Number	Type

P1G6 Grid Troffer Series

1'X4' 6 CELL

Dimensions

Dimensions are subject to change.
Consult factory for verification.
All configurations/options may not be shown.

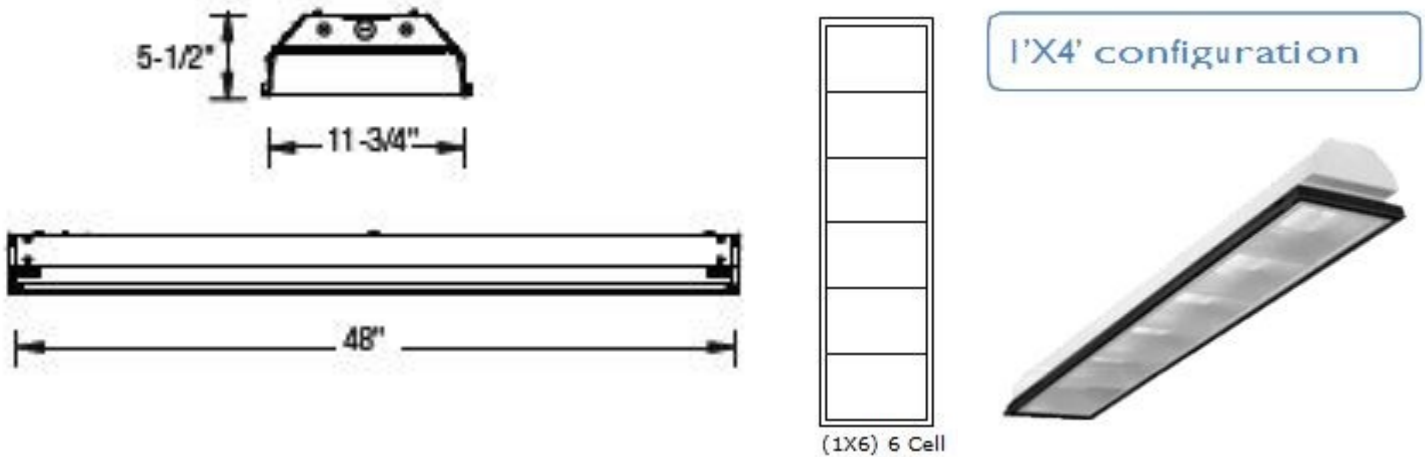

Ordering Information

Example: P1G6-3S3D32-4XV7

