

P2G32 Grid Troffer Series

2x4 32 CELL 2 OR 4 LAMP

Features

- T-Bar installation
- 2 1/2" deep, semi-specular louver
- UL listed
- 2 or 4 lamp/ T8 or T5

Specifications

- Ballasts are thermally protected Class P, non-PCB and UL listed. And sound rated "A".
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for T-Bar or dry wall mounting (with optional flange kit).
- Louver is 2 1/2" deep, semi-specular, low iridescent aluminum.
- Four corner tie points for wire supports are provided for safety.

Application

- Commercial
- Offices
- Retail
- General lighting

Options

- -20 degree F
- Dimming
- Program Start
- Dual level wiring



Accessories

- Emergency battery pack
- Flange Kits



Catalog Number	Type

P2G32 Grid Troffer Series

2X4 32 CELL

Dimensions


Dimensions are subject to change.
Consult factory for verification.
All configurations may not be shown.

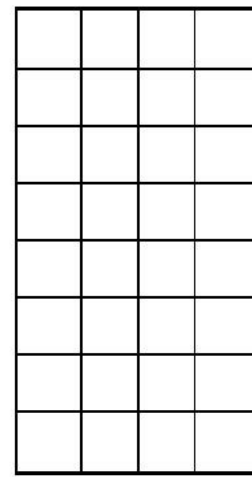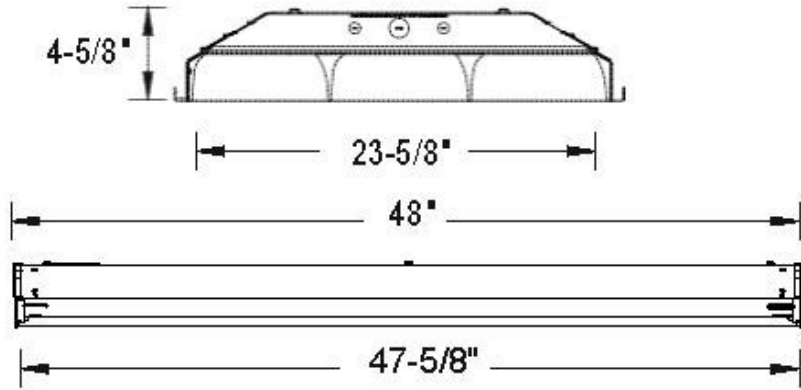

(4X8) 32 Cell

Ordering Information

Example: P2G32-3S432-4XV1

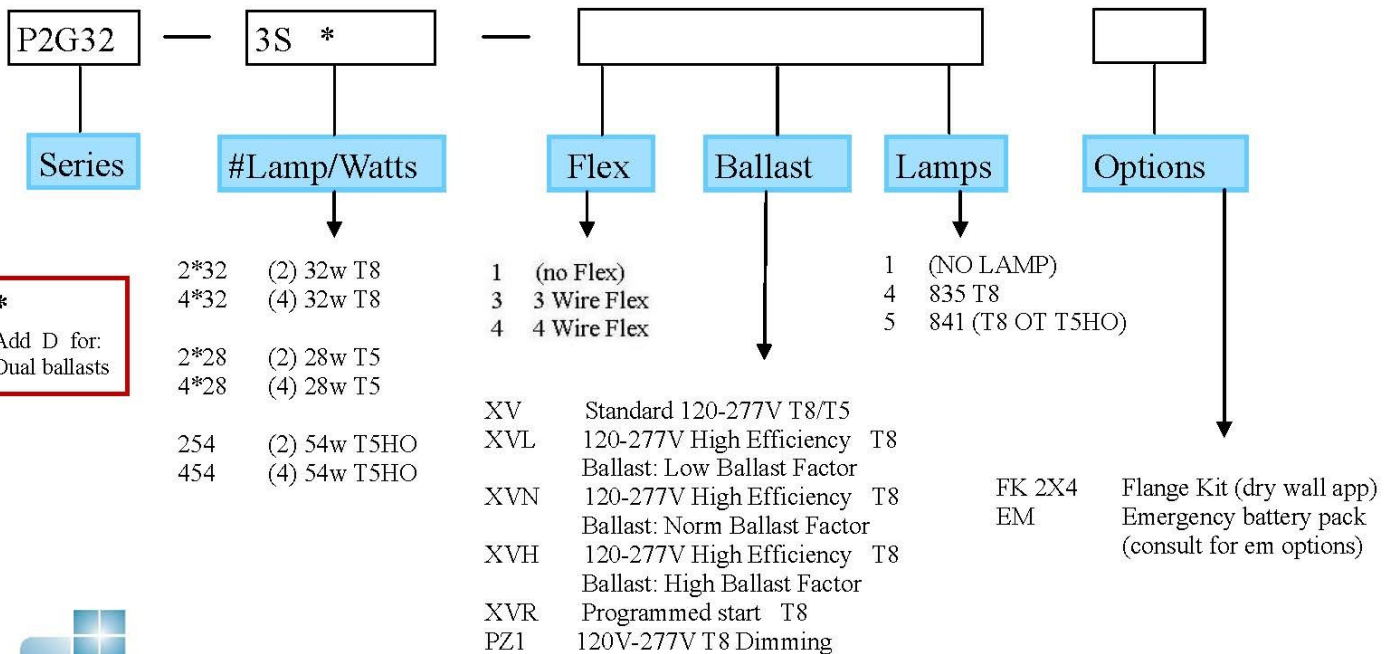

*
Add D for:
Dual ballasts

