

Features

- White finish, wall or ceiling mount
- Choice of two lenses
- Up, down and front lighting options available
- UL Listed

Specifications

- Ballasts are thermally protected class P, non-PCB & UL listed. Electronic ballasts are sound rated A. Multi volt 0° F ballast T8.
- Housings are formed from cold rolled steel and painted with a high gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for ceiling or wall mounting and is available in 2, 3 or 4' lengths.
- Standard diffuser is 100% translucent virgin acrylic.

Application

- Commercial/residential
- Corridors
- Bathrooms
- Hospitals
- Elder care facilities
- Hotels and motel facilities

Options

- Dimming
- Dual level wiring
- -20° F T8 120-277v instant start.
- Program start
- LBF (T8 low ballast factor)
- HBF (T8 high ballast factor)



Accessories

- Emergency battery pack
- Switch 120v
- 4 way switches 120v
- Directional baffles
- Integral mount occupancy sensors

Catalog Number	Type


900 Series

1 OR 2 LAMP




Dimensions

Dimensions are subject to change.
Consult factory for verification.
All configurations/options may not be shown.

Back View

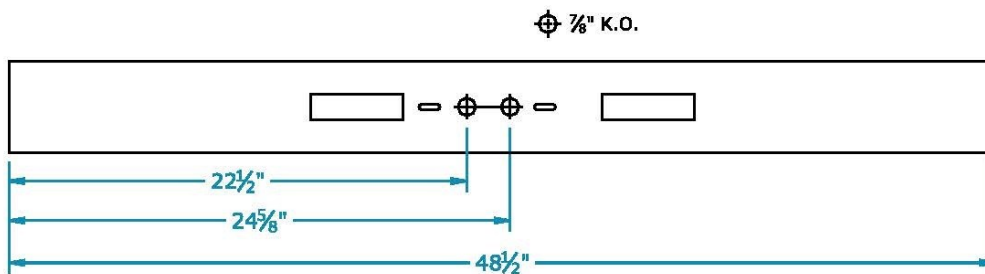


End View

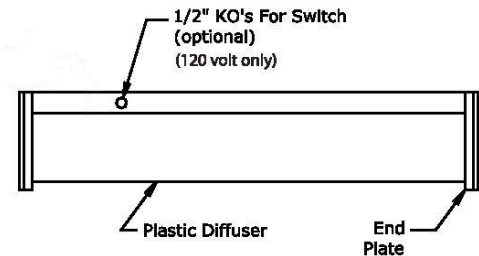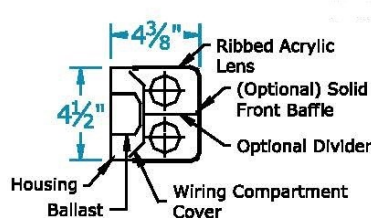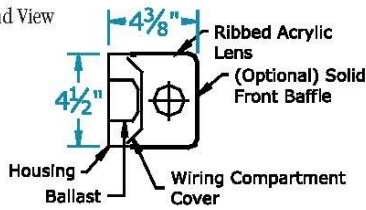

Ordering Information

Example: 902-32 XV

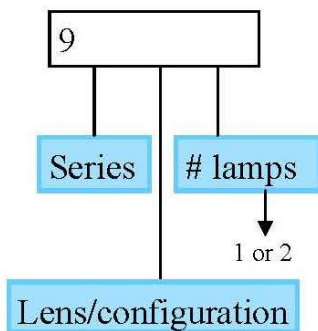

Lamp watt	Options
17	17W T8 2'
25	25W T8 3'
32	32W T8 4'

Ballast	Options
XV	Standard 120-277V T8
XXV	120-277V High Efficiency T8 Ballast: Low Ballast Factor
XVN	120-277V High Efficiency T8 Ballast: Norm Ballast Factor
XVH	120-277V High Efficiency T8 Ballast: High Ballast Factor
XVR	Programmed start T8
PZ1	Dimming (consult for options)

Options	
EM	Emergency battery pack
D/L	Dual level switching

0 Standard prismatic lens
Or:
H hospital configuration:
Lamp divider./front baffle/4
way switch and dual ballasts
Installed.

