

Features

- White finish, wall or ceiling mount
- Installed motion sensor
- UL listed
- Mounts on ceiling or wall above stairwell entry
- 2, 3, and 4' lengths

Specifications

- Dual 120-277v standard 1 lamp instant start T8 ballasts installed allows 1 lamp on 100% of the time/1 lamp off until motion is detected then both lamps on.
- Ballasts are thermally protected Class P, non-PCB and UL listed. And sound rated "A".
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for ceiling or wall mounting above door entry.
- Standard diffuser is 100% virgin translucent ribbed acrylic.
- Installed integral mount occupancy sensor adjustable from 30 seconds to 30 minute intervals.

Application

- Above door in stairwells, when optimal energy savings is required.



Accessories

- Emergency battery pack

Certifications/Ratings

- Meets ASHRAE 90.1—2013 standards



Catalog Number	Type



9S STAIRWELL FIXTURE

DUAL-LEVEL STAIRWELL LUMENIRE

Dimensions

Dimensions are subject to change.
Consult factory for verification.
All configurations may not be shown.

Back View

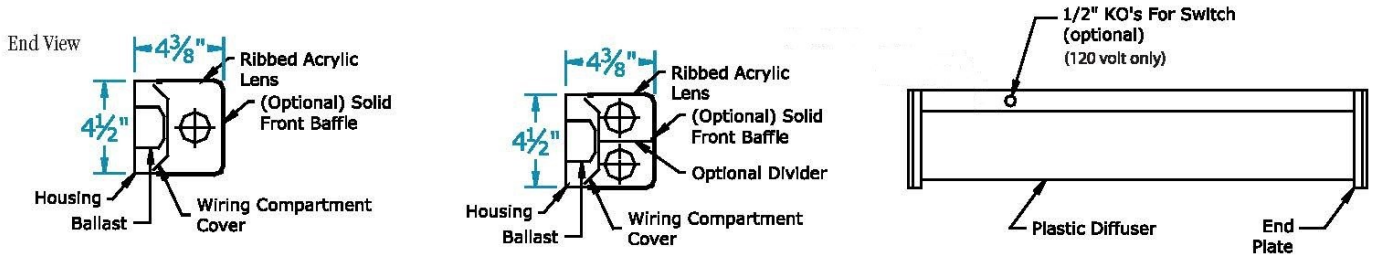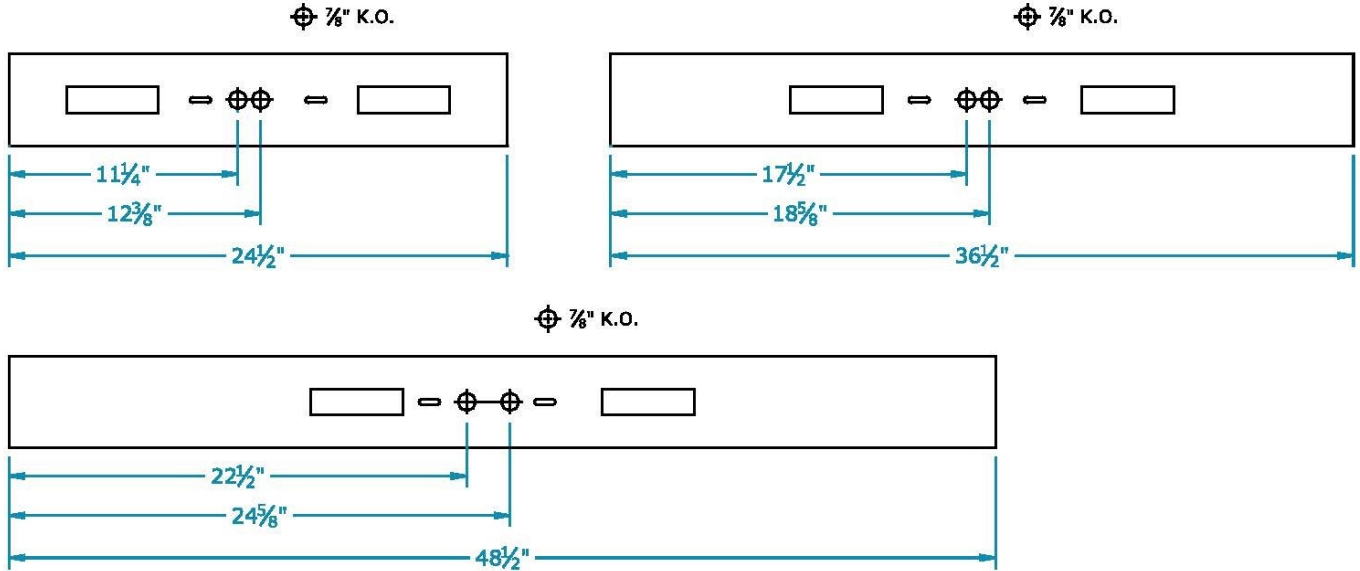

Integral Fixture Mount Occupancy Sensor installed on the face of the fixture to provide maximum range

Luminaire Occupancy Sensor

Energy savings for linear and task lighting fixtures



Ordering Information

CATALOG #	# LAMP/TYPE	O/A LENGTH	O/A WIDTH	O/A DEPTH
9S-217 XVD/L OCC	2-F17 T8	24 1/2"	4 1/2"	4 3/8"
9S-225 XVD/L OCC	2-F25 T8	36 1/2"	4 1/2"	4 3/8"
9S-232 XVD/L OCC	2-F32 T8	48 1/2"	4 1/2"	4 3/8"

