

Features

- White 1 7/8" deep under cabinet
- Three lengths available
- Ribbed translucent white lens
- UL Listed

Specifications


- Ballasts are thermally protected class P, non-PCB & UL listed. Electronic ballasts are sound rated A. Standard 120v 32° F T8 ballast. Multi volt 0° F T8 & T5, -20° F T5HO.
- Housings are formed from cold rolled steel and painted with a high gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Standard diffuser is 100% virgin ribbed white acrylic.

Application

- Commercial/residential
- Kitchens
- Offices
- Laundry rooms
- Closets (over door header)

Options

- Dimming
- -20° F T8 120-277v instant start.
- Program start
- LBF (T8 low ballast factor)
- HBF (T8 high ballast factor)

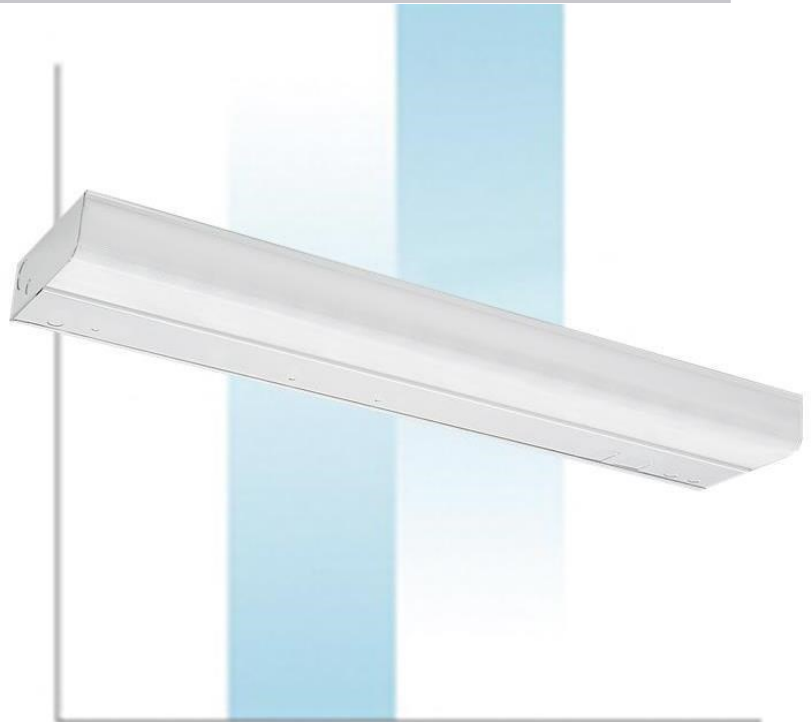

Accessories

- Emergency battery pack
- 120V cords
- Integral mount occupancy sensor
- LED lamps



Catalog Number	Type

UC Series


UNDER CABINET

Dimensions

Dimensions are subject to change.
Consult factory for verification.
All configurations/options may not be shown.

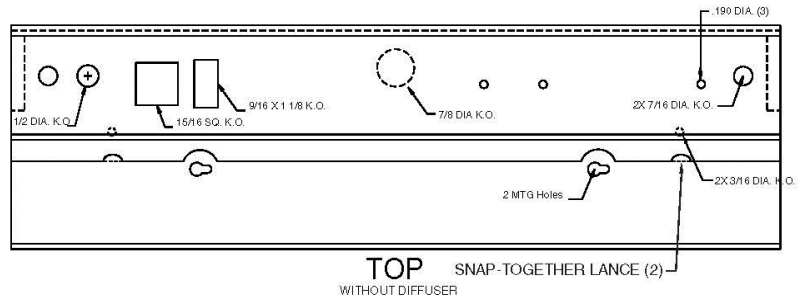

Back View

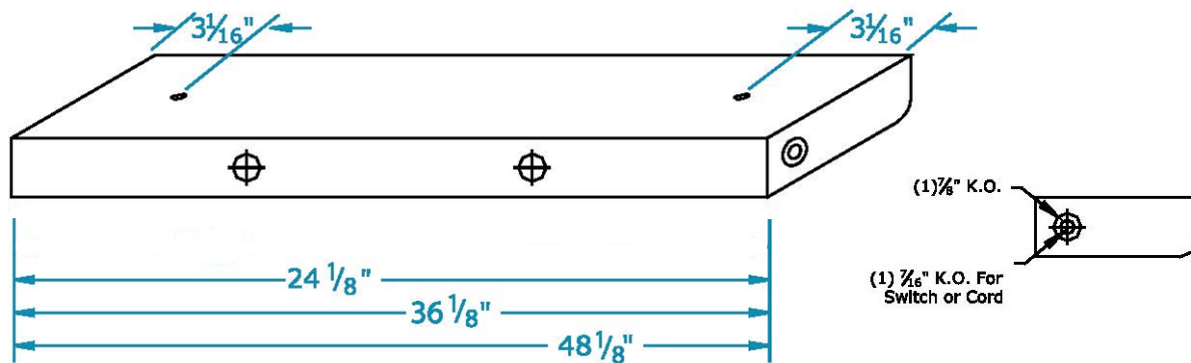

Ordering Information

Example: UC-117 EL

