


600 Series

2' - 8'


Dimensions

Dimensions are subject to change.
Consult factory for verification.
All configurations/options may not be shown.

Back View

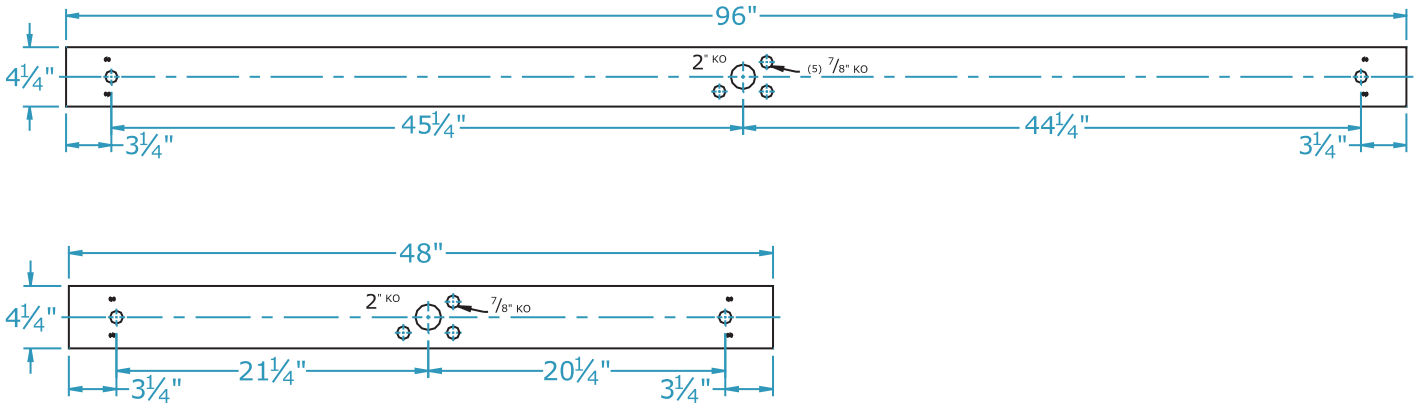

End View

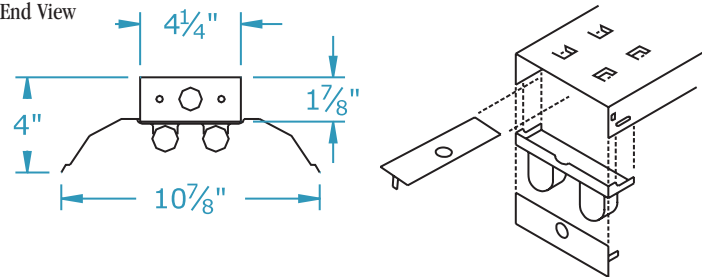

Ordering Information

Catalog #	No & Lamp Type	O/A Length	O/A Width	O/A Depth	Wt.
602-17 XV	2-F17T8	24"	10 7/8"	4"	7
602-25 XV	2-F25T8	36"	10 7/8"	4"	8
602-32 XV	2-F32T8	48"	10 7/8"	4"	9 1/2
6T4-25-6 XV#	4-F25T8	72"	10 7/8"	4"	15 1/2
602-72 T8 XV	2-F72T8	72"	10 7/8"	4"	15 1/2
6T4-32-8 XV#	4-F32T8	96"	10 7/8"	4"	19
602-96 T8 XV	2-F96T8	96"	10 7/8"	4"	19
6T2-96-16 T8 XV#	2-F96T8	192"	10 7/8"	4"	32 3/4
602-48 T8 HO XV	2-F48T8HO	48"	10 7/8"	4"	13
602-96 T8 HO XV	2-F96T8HO	96"	10 7/8"	4"	20 1/2

Tandem fixtures

Note: 6 ft and 8 ft fixtures have 2 piece reflectors

Photometrics

Studies based on room surface reflectance 80%-Ceiling, 50%-Wall, 20% Floor.

CATALOG NUMBER: 6T4-32-8 XV

TOTAL LUMINAIRE EFFICIENCY = 88.0 %

CIE TYPE - DIRECT


PLANE : 0-DEG 90-DEG

SPACING CRITERIA : 1.3 1.5

SHIELDING ANGLES : 1 5

LUMINOUS LENGTH : 95.938 10.938

Candle Power Distribution Curve



LEGEND:

0-deg: - - - - -
45-deg: _____
90-deg: - - - - -

Coefficients of Utilization

Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC%	80			50			30			
RW%	70	50	30	10	50	30	10	50	30	10
0	105	105	105	105	98	98	98	94	94	94
1	95	90	86	82	84	81	78	81	78	76
2	85	77	71	65	72	67	63	70	65	62
3	77	67	59	53	63	57	52	60	55	51
4	70	59	50	44	55	48	43	53	47	42
5	64	52	44	37	49	42	37	47	41	36
6	59	46	38	32	44	37	32	42	36	31
7	54	42	34	28	40	33	28	38	32	27
8	51	38	30	25	36	29	24	35	29	24
9	47	35	27	22	33	27	22	32	26	22
10	44	32	25	20	31	24	20	30	24	20

