

Ultra Light T5 Series

SIDEMOUNT, RIGHT ANGLE OR OPEN STRIP

Features

- White finish, surface mount
- Designed for limited space application
- Roto lock, snap-in polycarbonate sockets
- UL Listed

Specifications


- Ballasts are thermally protected Class P, non-PCB and UL listed. Electronic ballasts are sound rated "A".
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for ceiling or wall mounting and is available in many sizes and lamp configurations.

Application

- Commercial or residential
- Coves
- Narrow soffits
- Jewelry cases
- Display cabinets

Options

- 120 volt
- 277 volt
- Multi-volt (120-277v, 50 or 60 Hertz)
- 0 Degree F
- Dimming
- THD less than 10% - rapid start
- Program Start
- Dual level wiring

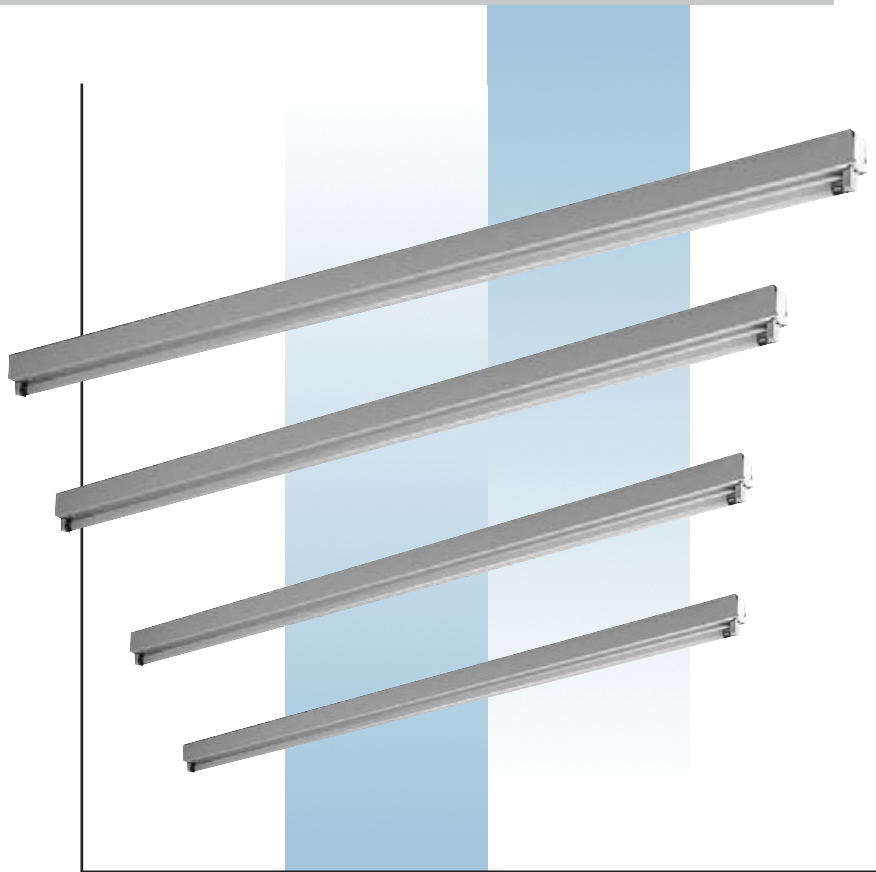

Accessories

- Reflectors

| Catalog Number | Type |
|----------------|------|
| | |