

# Staggered Strip Series

2', 3', 4', & 5' 2 LAMP 4" OFFSET

## Features

- White finish, surface mount
- Designed for row mounting
- Rotary lock, polycarbonate sockets
- 7/8" Knock-out on end plates
- UL Listed

## Specifications


- Ballasts are thermally protected Class P, non-PCB and UL listed. Electronic ballasts are sound rated "A".
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for surface, recess and cove mounting.

## Application

- Commercial or residential
- Soffits
- Offices
- Wall wash
- Coves

## Options

- 120 volt
- 277 volt
- Multi-volt (120-277v, 50 or 60 Hertz)
- 0 Degree F
- Dimming
- THD less than 10% - instant start
- THD less than 10% - rapid start
- Program Start
- Low Watt (Low Ballast Factor)
- High Light output (High Ballast Factor)
- Dual level wiring

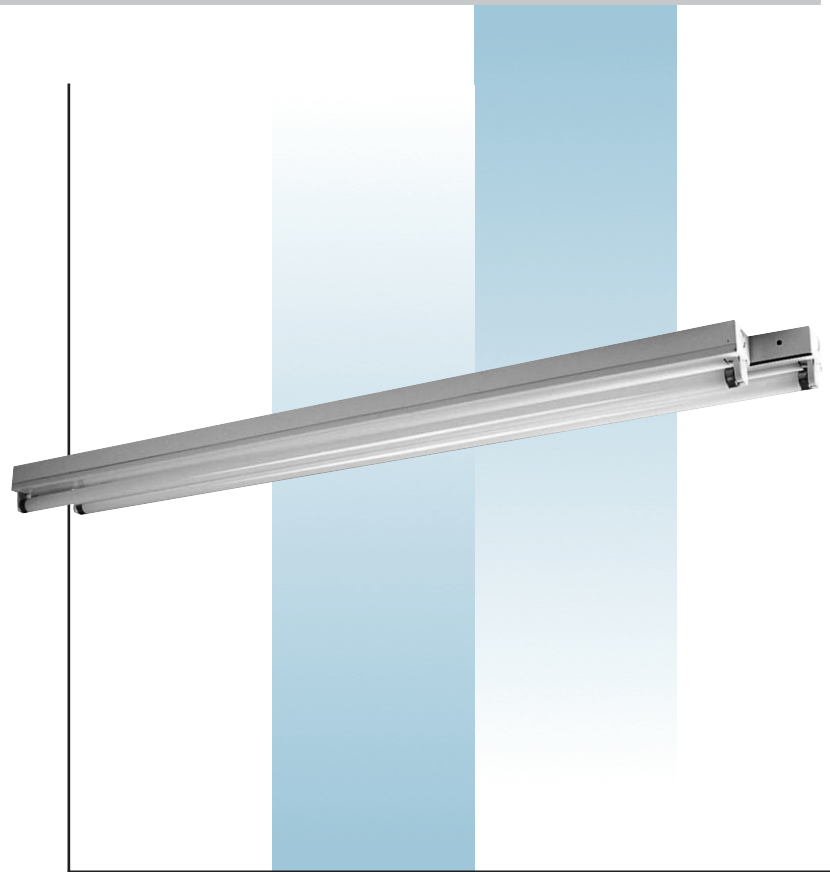

## Accessories

- Emergency battery pack
- Reflectors
- Damp location labels

Catalog Number	Type