

113/114 Series

3 & 4 LAMP 9" WIDE

Features

- White finish, surface mount
- Cover attaches without fasteners
- UL Listed

Specifications


- Ballasts are thermally protected Class P, non-PCB and UL listed. Electronic ballasts are sound rated "A".
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for ceiling mounting and is available in many sizes and lamp configurations.

Application

- Commercial
- Garages
- Coves
- General lighting

Options

- 120 volt
- 277 volt
- Multi-volt (120-277v, 50 or 60 Hertz) Consult factory
- 0 Degree F
- Dimming (Consult factory)
- THD less than 10% - instant start
- THD less than 10% - rapid start
- Program Start
- Low Watt (Low Ballast Factor)
- High Light output (High Ballast Factor)
- Dual level wiring
- T12 configurations (subject to federal law)
- Very high output (VHO)

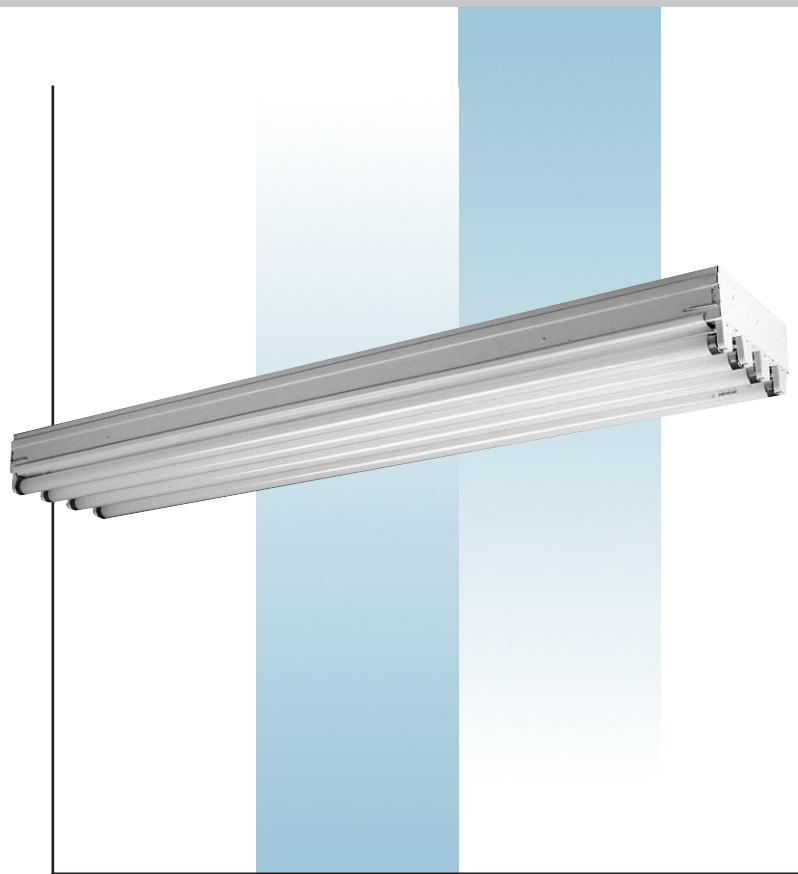

Accessories

- Emergency battery pack
- Wire guards
- Plug thru circuits

Catalog Number	Type