

Soft Light Grid Troffer Series

2X4 DIRECT / INDIRECT

Features

- T-bar installation
- Metal perforated basket for glare-free lighting
- UL Listed

Specifications


- Ballasts are thermally protected Class P, non-PCB and UL listed. Electronic ballasts are sound rated "A".
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for T-bar ceiling mounting.
- Visible reflectance surface is painted with flat white enamel for a soft appearance
- Perforated metal basket has an acrylic inlay to diffuse the light.

Application

- Commercial or residential
- Libraries
- Offices
- General lighting

Options

- 120 volt
- 277 volt
- Multi-volt (120-277v, 50 or 60 Hertz)
- 0 Degree F
- Dimming
- THD less than 10% - instant start
- THD less than 10% - rapid start
- Program Start
- Low Watt (Low Ballast Factor)
- High Light output (High Ballast Factor)
- Dual level wiring

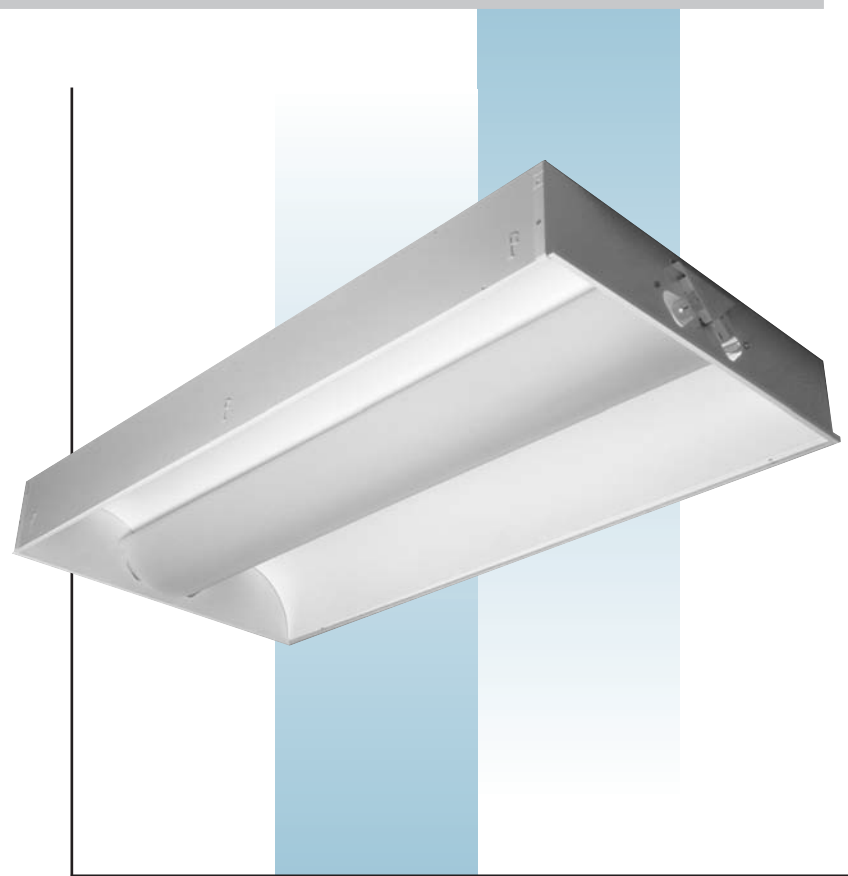

Accessories

- Emergency battery pack
- Flex
- Radio interference filter
- Fuses

Catalog Number	Type