


# 101 Series

1 LAMP 3" WIDE OPEN CHANNEL

## Dimensions

Dimensions are subject to change.  
Consult factory for verification.  
All configurations/options may not be shown.

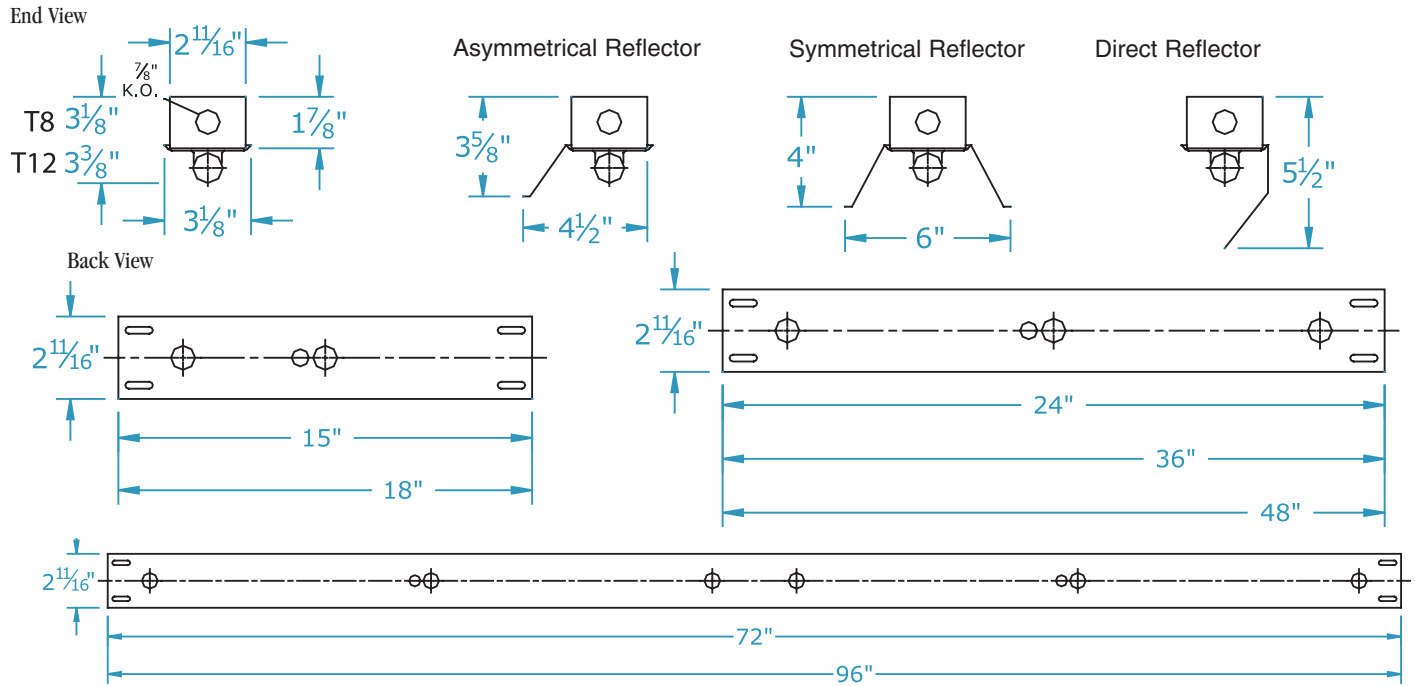

## Ordering Information

Catalog #	No & Lamp Type	O/A Length	O/A Width	O/A Depth	Wt.
<b>Magnetic *</b>					
101-14 TS	1-F14T12	15"	3 1/8"	3 3/8"	3 1/4
101-15 TS	1-F15T12	18"	3 1/8"	3 3/8"	3 1/2
<b>Electronic – T8</b>					
101-17 XV	1-F17T8	24"	3 1/8"	3 1/8"	3 3/4
101-25 XV	1-F25T8	36"	3 1/8"	3 1/8"	4 1/2
101-32 XV	1-F32T8	48"	3 1/8"	3 1/8"	5 1/4
102-17 NB XV	2-F17T8	24"	3 1/8"	3 1/8"	3
102-25 NB XV	2-F25T8	36"	3 1/8"	3 1/8"	4
102-32 NB XV	2-F32T8	48"	3 1/8"	3 1/8"	5
<b>Tandem Units #</b>					
1T2-25-6 XV	2-F25T8	72"	3 1/8"	3 1/8"	8 1/2
1T2-32-8 XV	2-F32T8	96"	3 1/8"	3 1/8"	9
1T3-32-12 XV	3-F32T8	144"	3 1/8"	3 1/8"	12
1T4-32-16 XV	4-F32T8	192"	3 1/8"	3 1/8"	15 1/4
1T4-25-6 NB XV	4-F25T8	72"	3 1/8"	3 1/8"	8
1T4-32-8 NB XV	4-F32T8	96"	3 1/8"	3 1/8"	9

\* Consult factory for preheat (PH) or high power factor (HPF) applications.

# Consult factory for various other tandem length configurations.

